

AJ-019 Serie

Mini Low Profile Gang Jack - SINGLE PORT

Specifications

Material

Housing :	High Strength Thermoplastic Polyester
Contacts :	Phosphor Bronze
Contact Plating :	Gold Over Nickel On Mating Area, Tin-lead Alloy On Tails
Shield :	Copper Alloy, Tin Plated

Electrical

UL & cUL File :	E131820
FCC File :	E149026

Ordering Information

AJ-XXX-X-X-X

NUMBER OF POSITIONS

019-16 6 Positions
019-18 8 Positions

GOLD PLATING


1 = 15u 3 = 50u
2 = 30u 4 = 6u

NUMBER OF PORT
1 to 12 Ports

NUMBER OF POSITIONS & CONTACTS

F = 8p8c
B = 6p2c , C = 6p4c , D = 6p6c


PCB LAYOUT

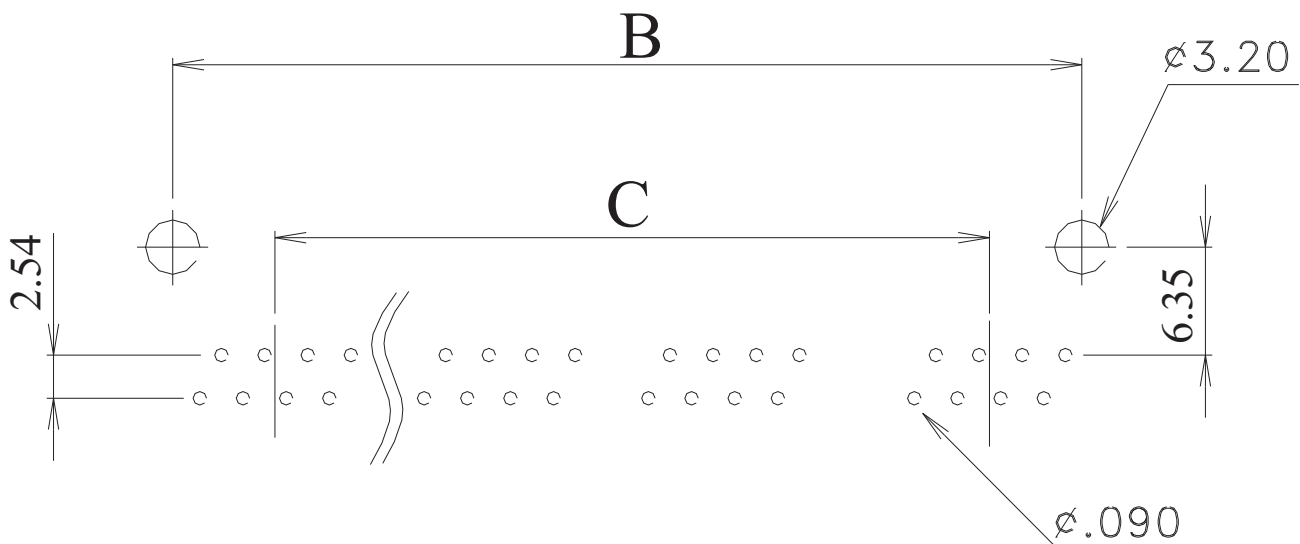

AJ-019 Serie


Very Low Profile Gang Jack - SINGLE PORT

AJ-019-16

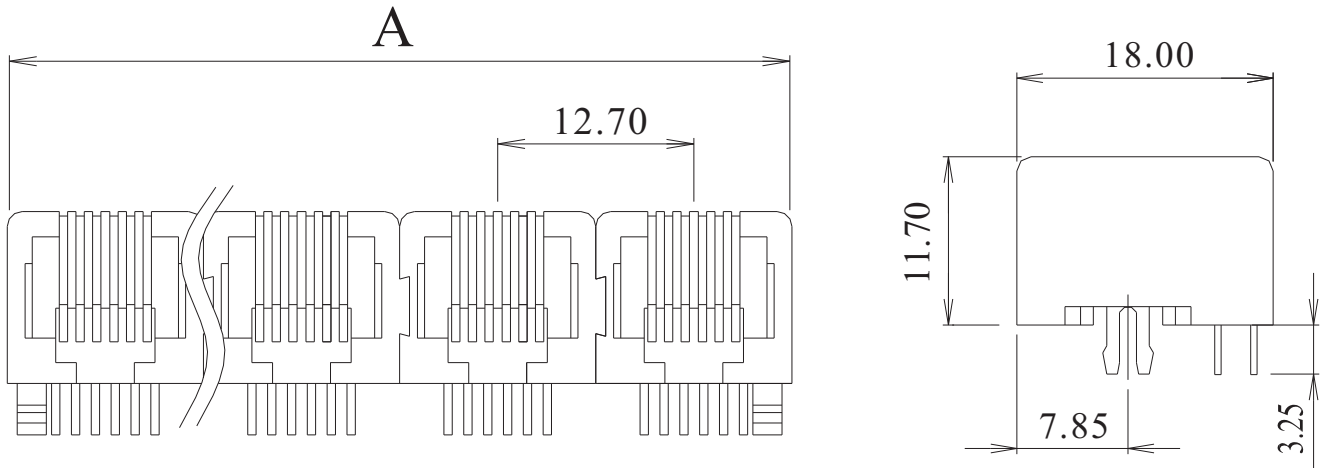

Number Of ports	2	3	4	5	6	7	8	9	10	11	12
A	25.90	38.60	51.30	64.00	76.70	89.40	102.10	114.80	127.50	140.20	152.90
B	22.86	35.56	48.26	60.96	73.66	86.36	99.06	111.76	124.46	137.16	149.86
C	12.70	25.40	38.10	50.80	63.50	76.20	88.90	101.60	114.30	127.00	139.70

AJ-019-18

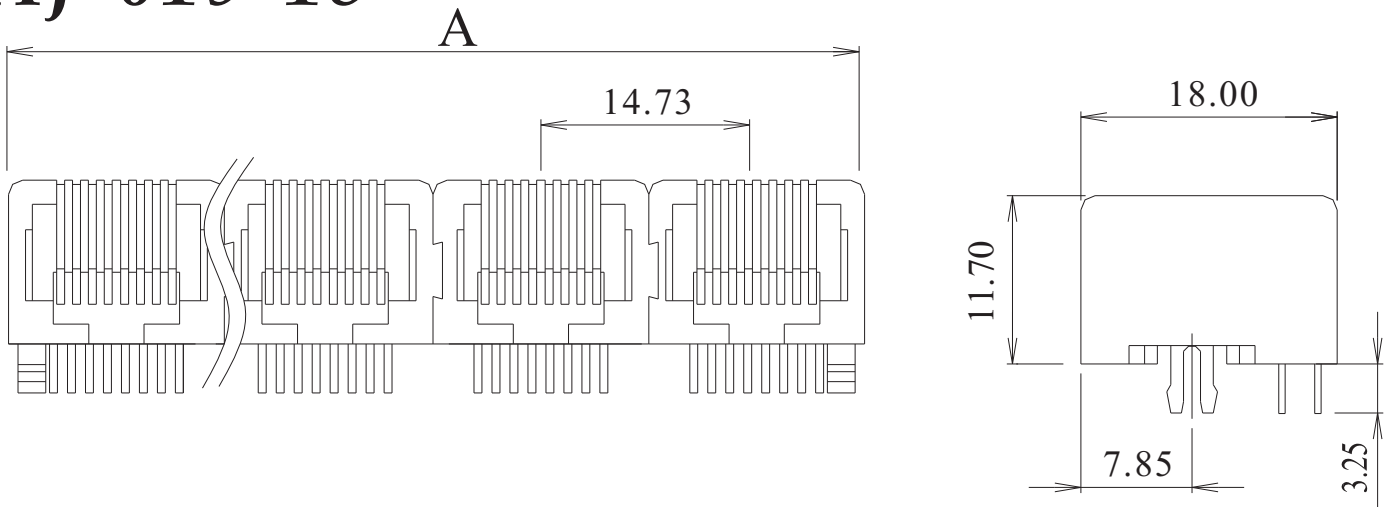

Number Of ports	2	3	4	5	6	7	8	9	10	11	12
A	30.14	44.96	59.78	74.60	89.42	104.24	119.06	133.88	148.70	163.52	178.34
B	26.33	41.15	55.97	70.79	85.61	100.43	115.25	130.07	144.89	159.71	174.52
C	14.73	29.44	44.15	58.86	73.57	88.28	102.99	117.70	132.41	147.12	161.83