

AJ-019 Serie

Very Low Profile Side Entry SMT - SINGLE PORT

Specifications

Material

Housing :	High Strength Thermoplastic Polyester
Contacts :	Phosphor Bronze
Contact Plating :	Gold Over Nickel On Mating Ared, Tin-lead Alloy On Tails
Shield :	Copper Alloy, Tin Plated

Electrical

UL & cUL File :	E131820
FCC File :	E149026

Ordering Information **AJ-XXX-X-X**

NUMBER OF POSITIONS

019-1SMD
019-2SMD
019SH-1SMD
019SH-2SMD
019SH-3SMD




GOLD PLATING

1 = 15u 3 = 50u
2 = 30u 4 = 6u

NUMBER OF POSITIONS & CONTACTS




D=6p6c , F = 8p8c

AJ-019-1SMD

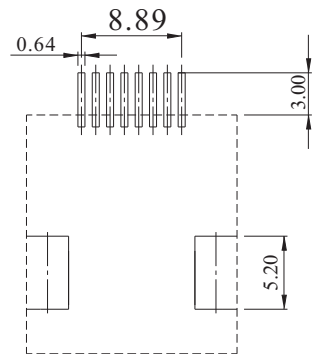

PCB LAYOUT

AJ-019-2SMD




PCB LAYOUT


AJ-019 Serie

Very Low Profile Side Entry SMT - SINGLE PORT

AJ-019SH-1SMD

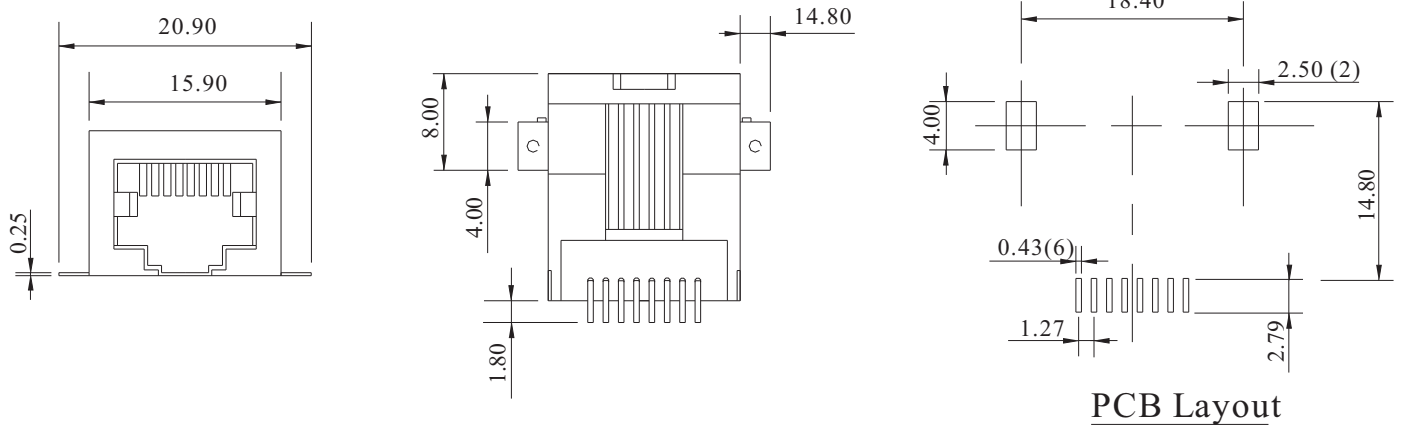

AJ-019SH-2SMD

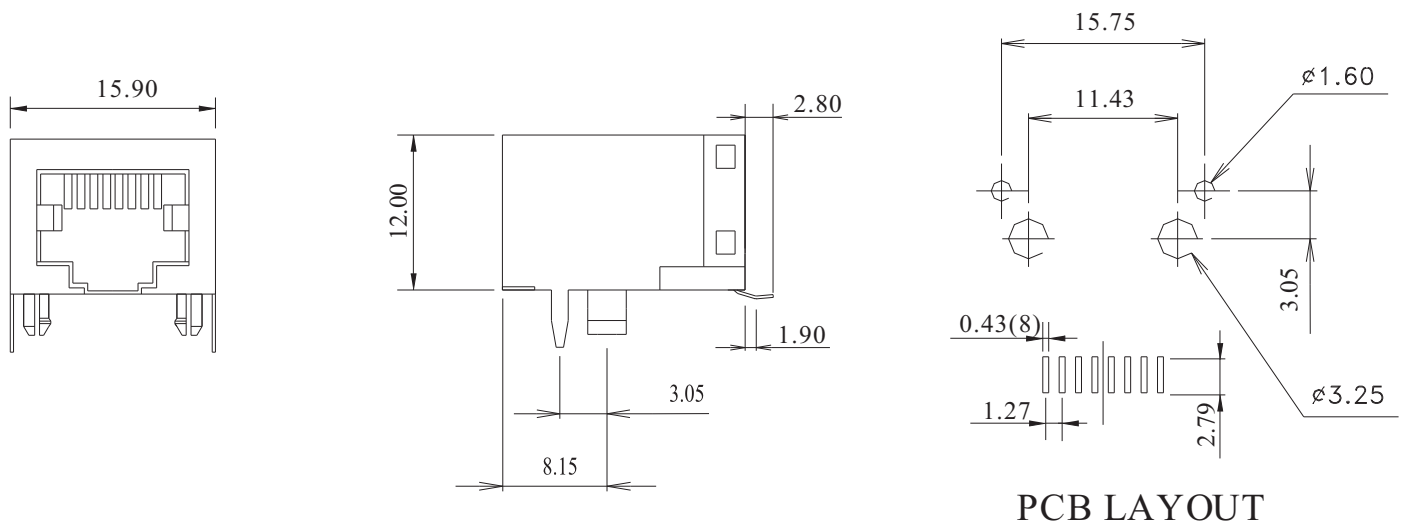

AJ-019SH-3SMD

