

AJ-066 Serie

Top entry SMT Jacks - SINGLE PORT

Specifications

Material

Housing : High Strength Thermoplastic Polyester
Contacts : Phosphor Bronze
Contact Plating : Gold Over Nickel On Mating Area, Tin-lead Alloy On Tails
Shield : Copper Alloy, Tin Plated

Electrical

UL & cUL File : E131820
FCC File : E149026

Ordering Information

AJ-066-X-X




Housing Number

NUMBER OF POSITIONS & CONTACTS

A = 4p4c
B = 6p2c , C = 6p4c , D = 6p6c
F = 8p8c

GOLD PLATING

1 = 15u , 3 = 50u
2 = 30u , 4 = 6u

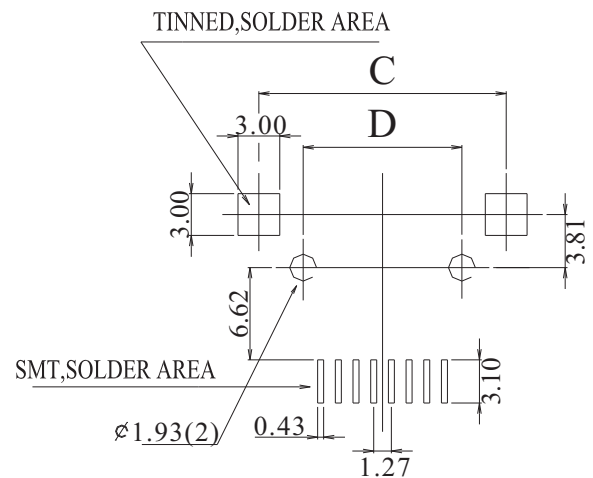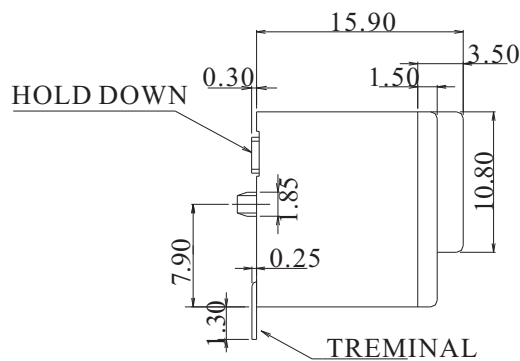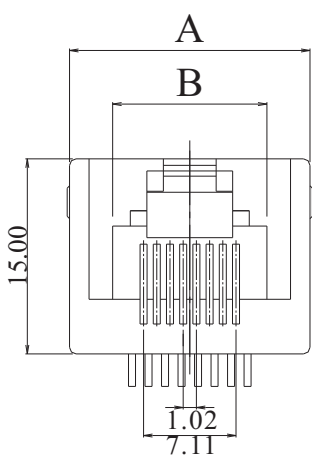

Number Of positions	A	B	C	D
4	14.42	11.48	13.50	7.62
6	16.46	13.48	15.50	10.16
8	18.50	15.48	17.78	11.43