


## SPECIFICATION

1. Panel material: 1.6 m/m thickness Metal, Black color painting.
2. RJ45 Jack: 8P8C 45 Degree Angle type, PBT UL 94V-0 rated, Yellow color.
3. Connector: 110D connectors UL 94V-2 PC, Light-Yellow color.
4. P.C.board: FR4 P.C.B. 1.6 m/m thickness, double side.
5. Jack Bracket Set: ABS UL 94V-0 rated, Black color.


Used for Color Coding Identification, Color optional.

6. Screws: Round head,  $\phi 3$  x 20 m/m, Silver color.

Category 5e Patch Panel, 45 Degree Angle type.



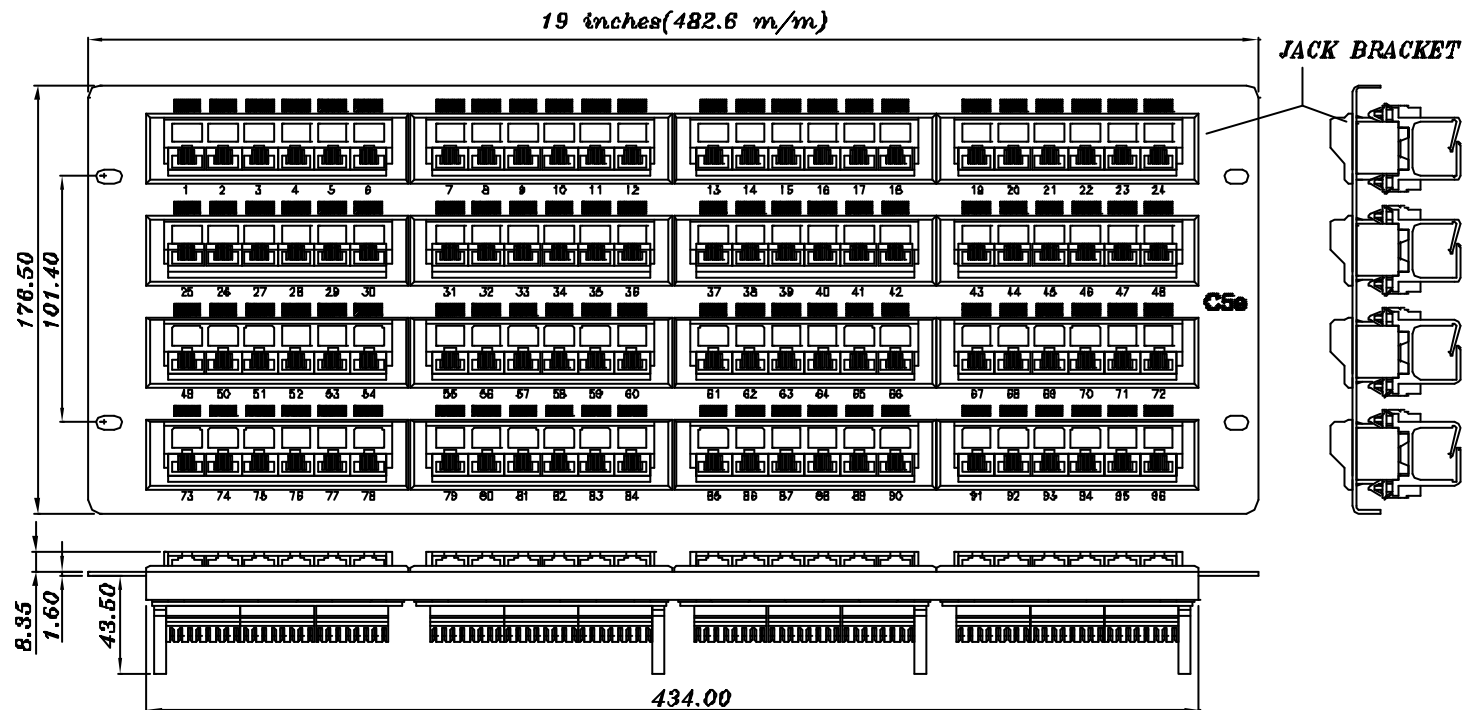


465.3

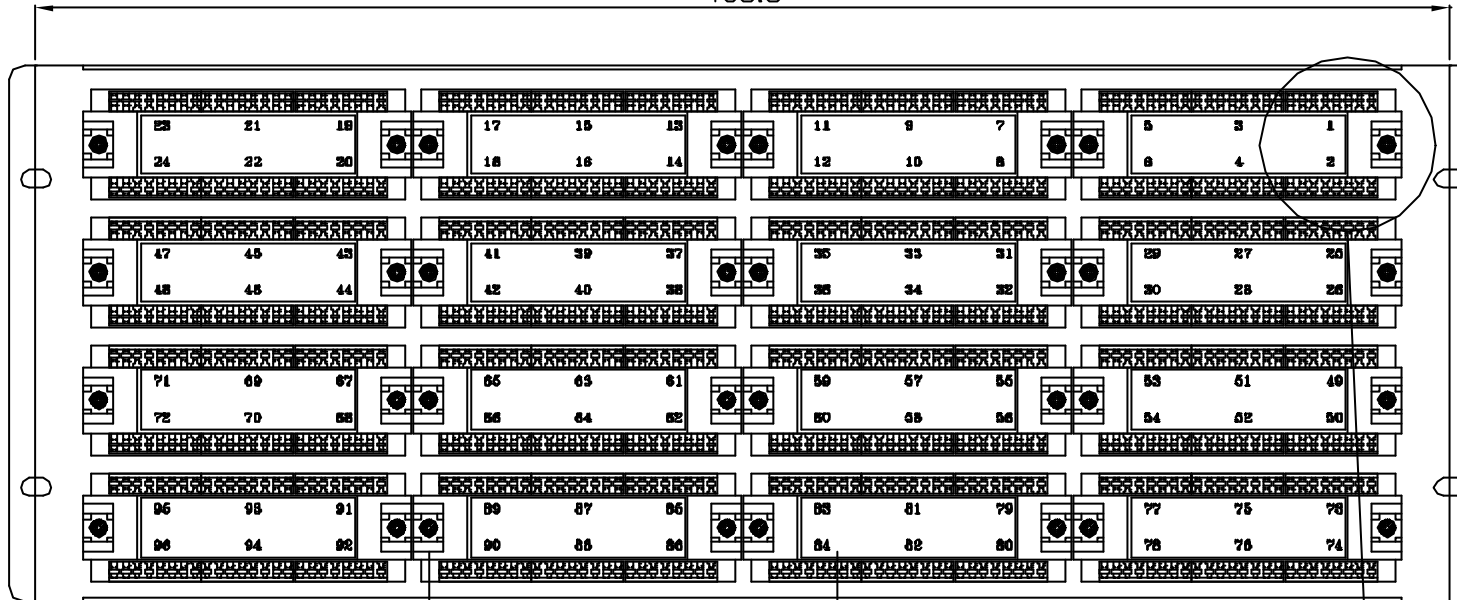

*CABLE BUCKLE  
FOR CABLE TIE*

*PORT INDICATION*

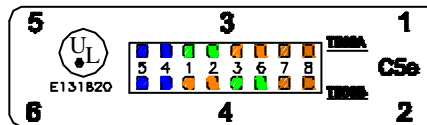

**T568A WIRING**

- PIN 5 WHITE/BLUE
- PIN 4 BLUE
- PIN 1 WHITE/GREEN
- PIN 2 GREEN
- PIN 3 WHITE/ORANGE
- PIN 6 ORANGE
- PIN 7 WHITE/BROWN
- PIN 8 BROWN

**T568B WIRING**

- PIN 5 WHITE/BLUE
- PIN 4 BLUE
- PIN 1 WHITE/ORANGE
- PIN 2 ORANGE
- PIN 3 WHITE/GREEN
- PIN 6 GREEN
- PIN 7 WHITE/BRDWN
- PIN 8 BROWN

